

DOOR MACHINING REQUIREMENTS FOR LEAD LINED WOOD DOORS - SINGLE SWING

/ACTIVE

Customer: _____ PO#: _____

Job Name: _____

Hinge / Pivot Mfg.: Temp. #: Temp. #: Size: Gauge: Backset:	Cylindrical Lock Mfg.: Series: Temp. #: Temp. #: Backset:	Dead Bolt Mfg.: Series: Temp. #: Temp. #: Function: Backset:	Mortise Lock Mfg.: Series: Temp. #: Temp. #: Function: Backset:
---	--	--	---

BEVEL	
Lock stile	Hinge stile

Veneer Species & Color :
 Grade:
 Cut:
 Match:



NOTE: All measurements from top of door to centerline of hardware!

Plastic Laminate Mfg:
 Color:
 Number:
 Plastic on stile:

Vision Lite	Width	Height
Cutout size:	x	
Note: Stile dimensions are to lite cutout!		
Lock stile:	Top Rail:	
Lite Kit:	Glass thk.:	Glass thk.:

Remarks/Special Instructions:

Door Type:
 Core Type:

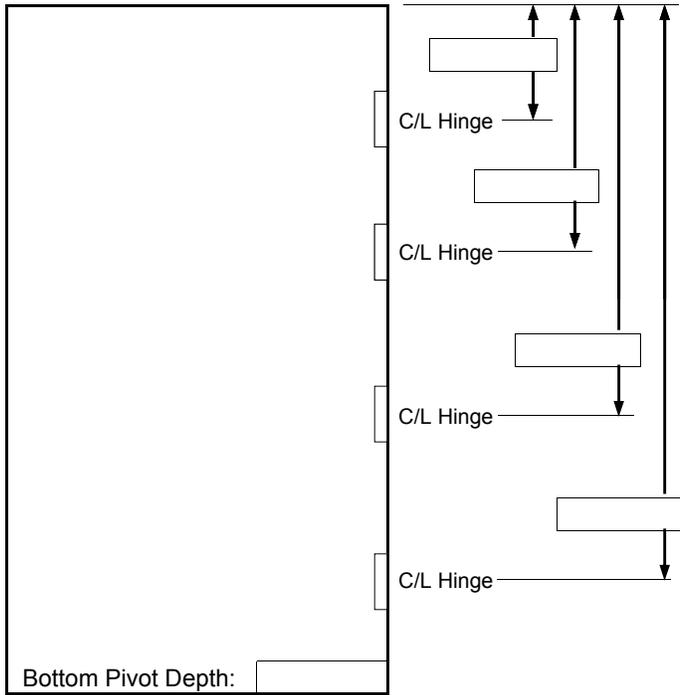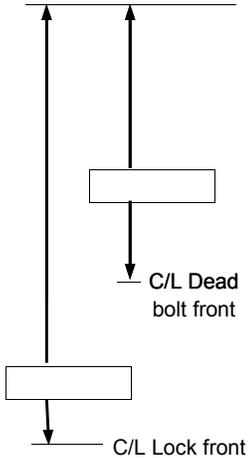

Frame manufacturer:

Frame Height (in inches)

(Use at doors with Pivots)

Quantity	Prefit size	Lead thickness	Label	Door Numbers	Swing

