


T-Flex® Shielding

floor shielding

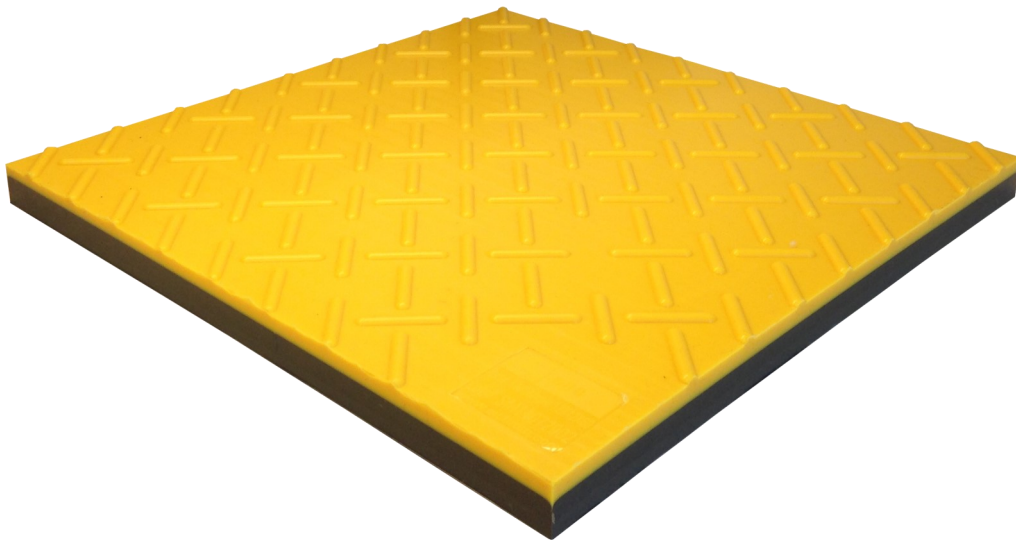

Designed to provide economical and ergonomic solutions for shielding sources below. Each tile combines the attenuation properties of T-Flex® with the durability of a work mat. They also can be cut for in field adjustments. The floor shielding features a non-slip diamond tread surface.

- Dry Cask Platforms
- Scorpion Platforms
- Refuel Bridge
- RCP Platform



Material	lb/ft ²	Thickness	Attenuation
T-Flex® Tungsten	10	0.375"	25%
T-Flex® Bismuth	10	0.515"	24%
T-Flex® Iron	10	0.765"	18%
T-Flex® Tungsten	15	0.505"	32%
T-Flex® Bismuth	15	0.725"	33%
T-Flex® Iron	15	1.125"	26%
T-Flex® Tungsten	20	0.645"	39%
T-Flex® Bismuth	20	0.945"	41%
T-Flex® Iron	20	1.475"	32%