



48 ⁵/₈"

77" OVERALL HEIGHT (INCLUDING WHEELS)

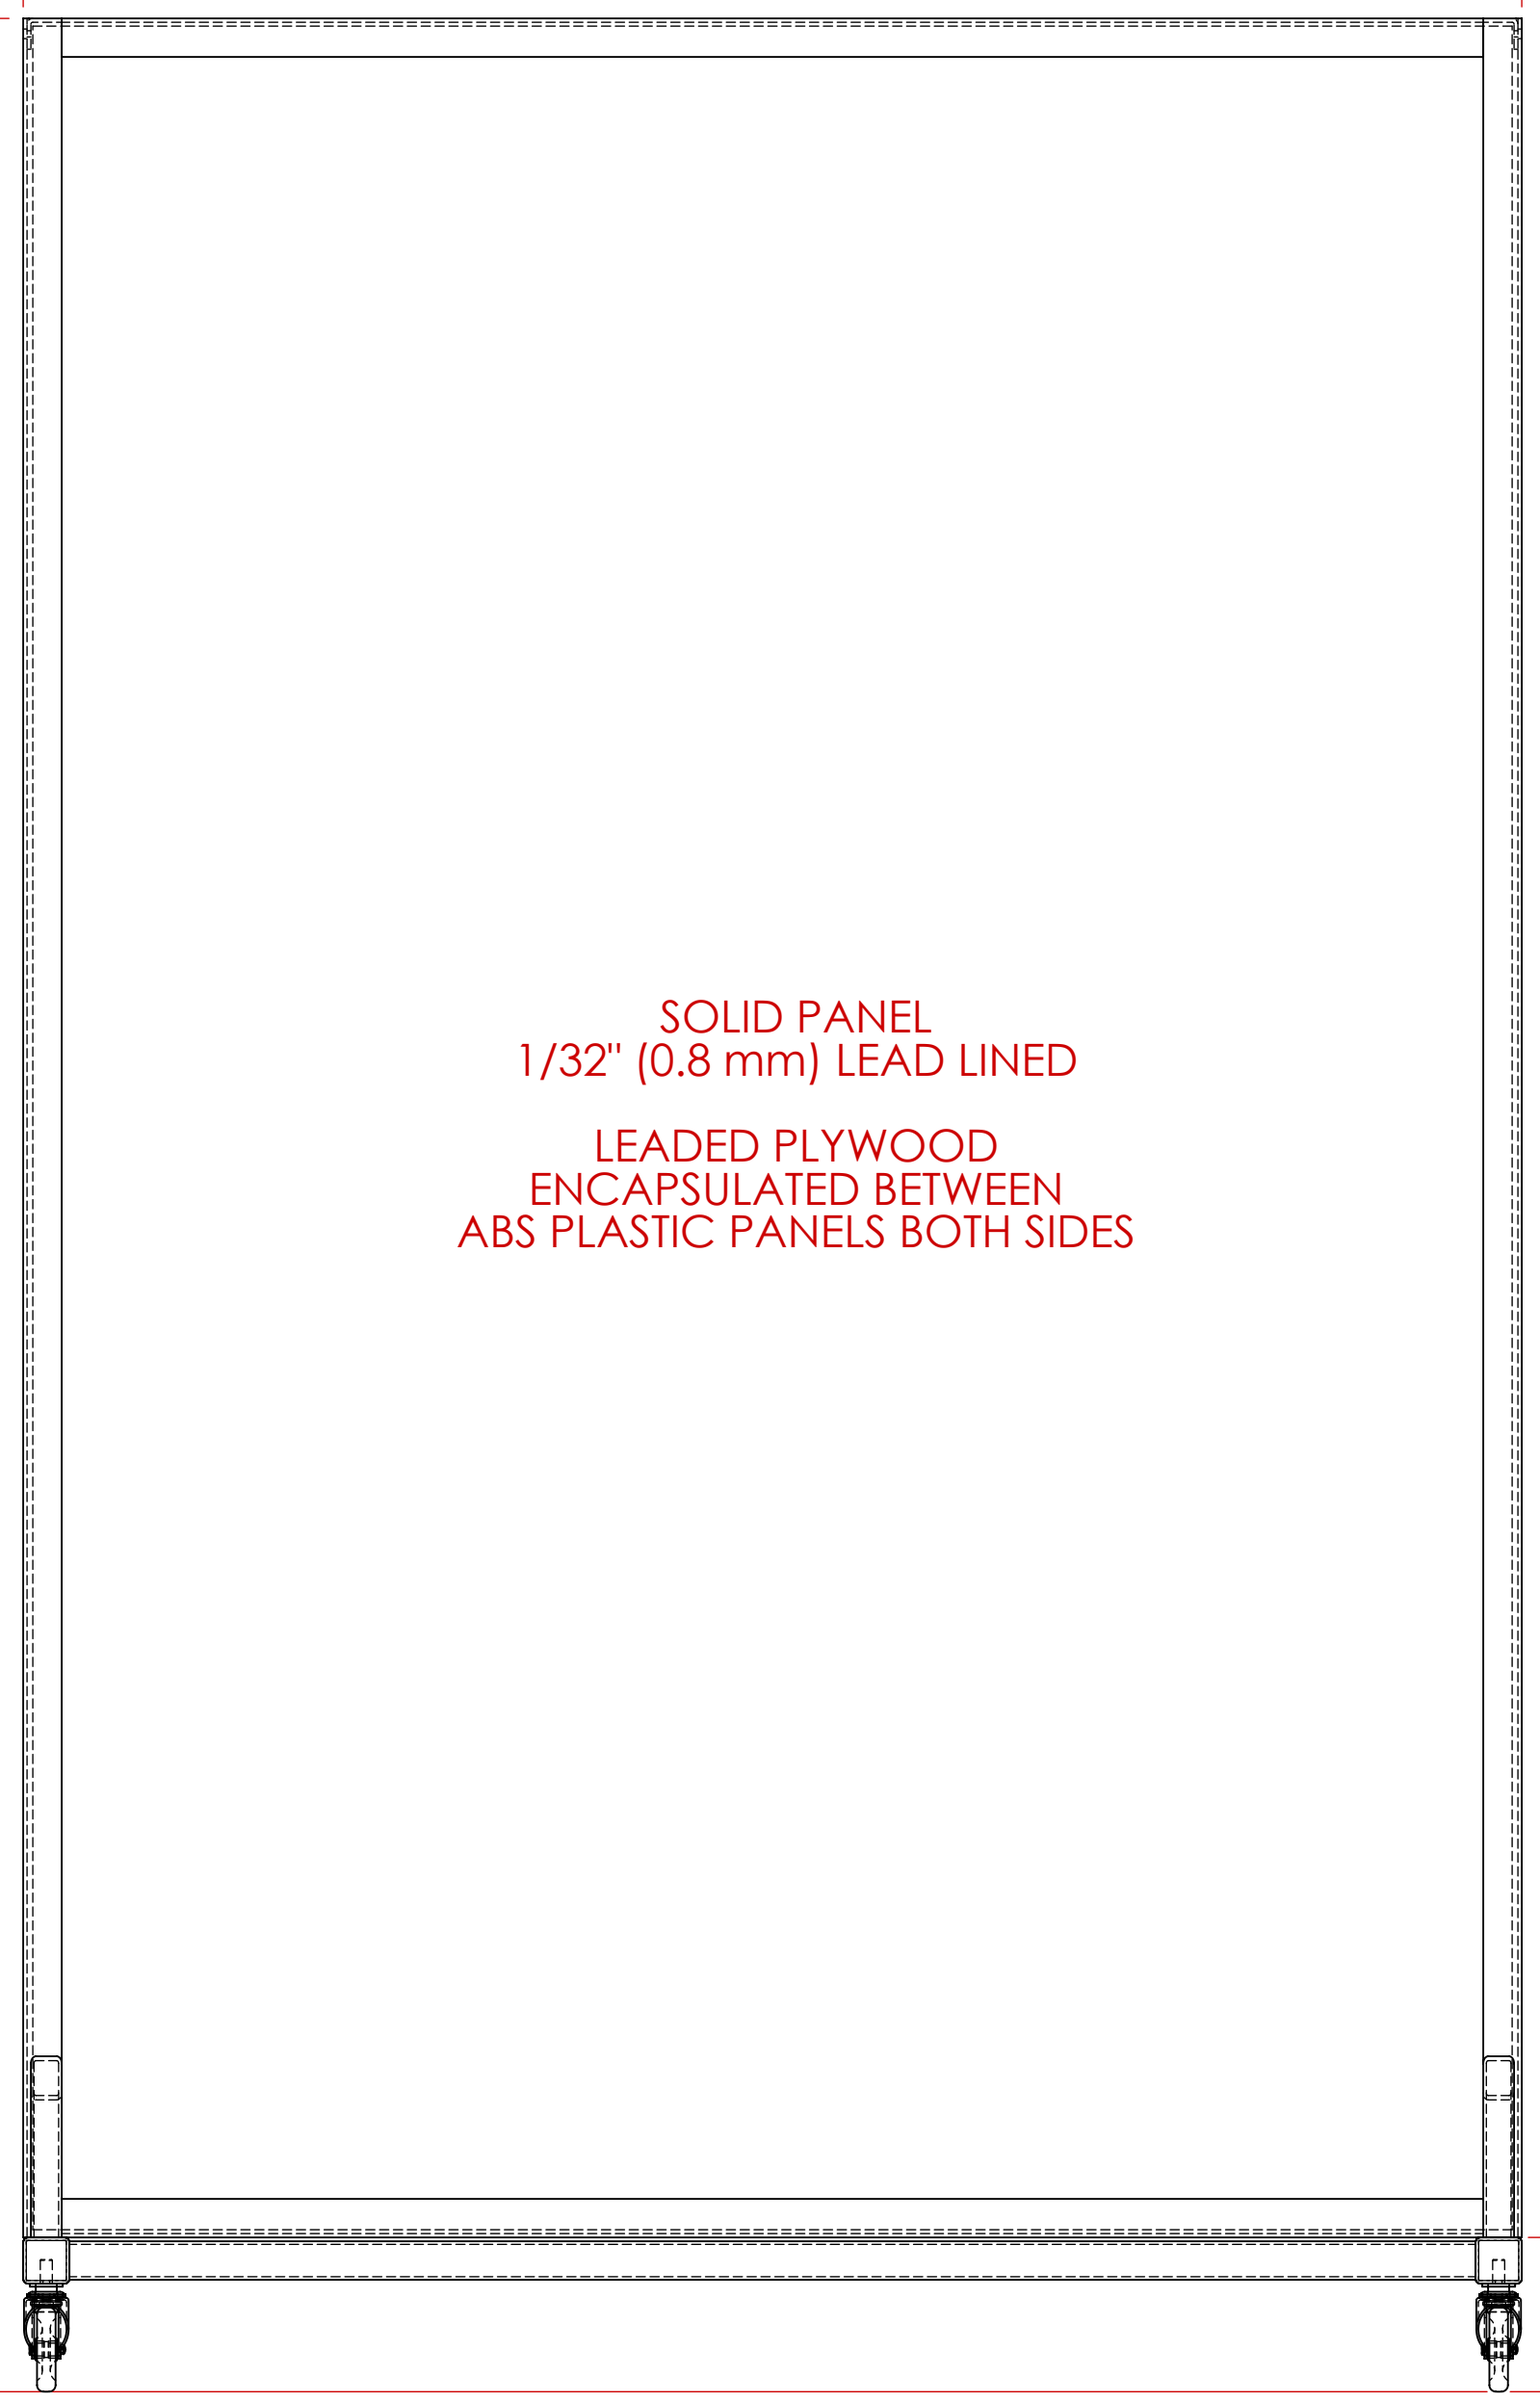


SOLID PANEL
1/32" (0.8 mm) LEAD LINED
LEADED PLYWOOD
ENCAPSULATED BETWEEN
ABS PLASTIC PANELS BOTH SIDES

5"

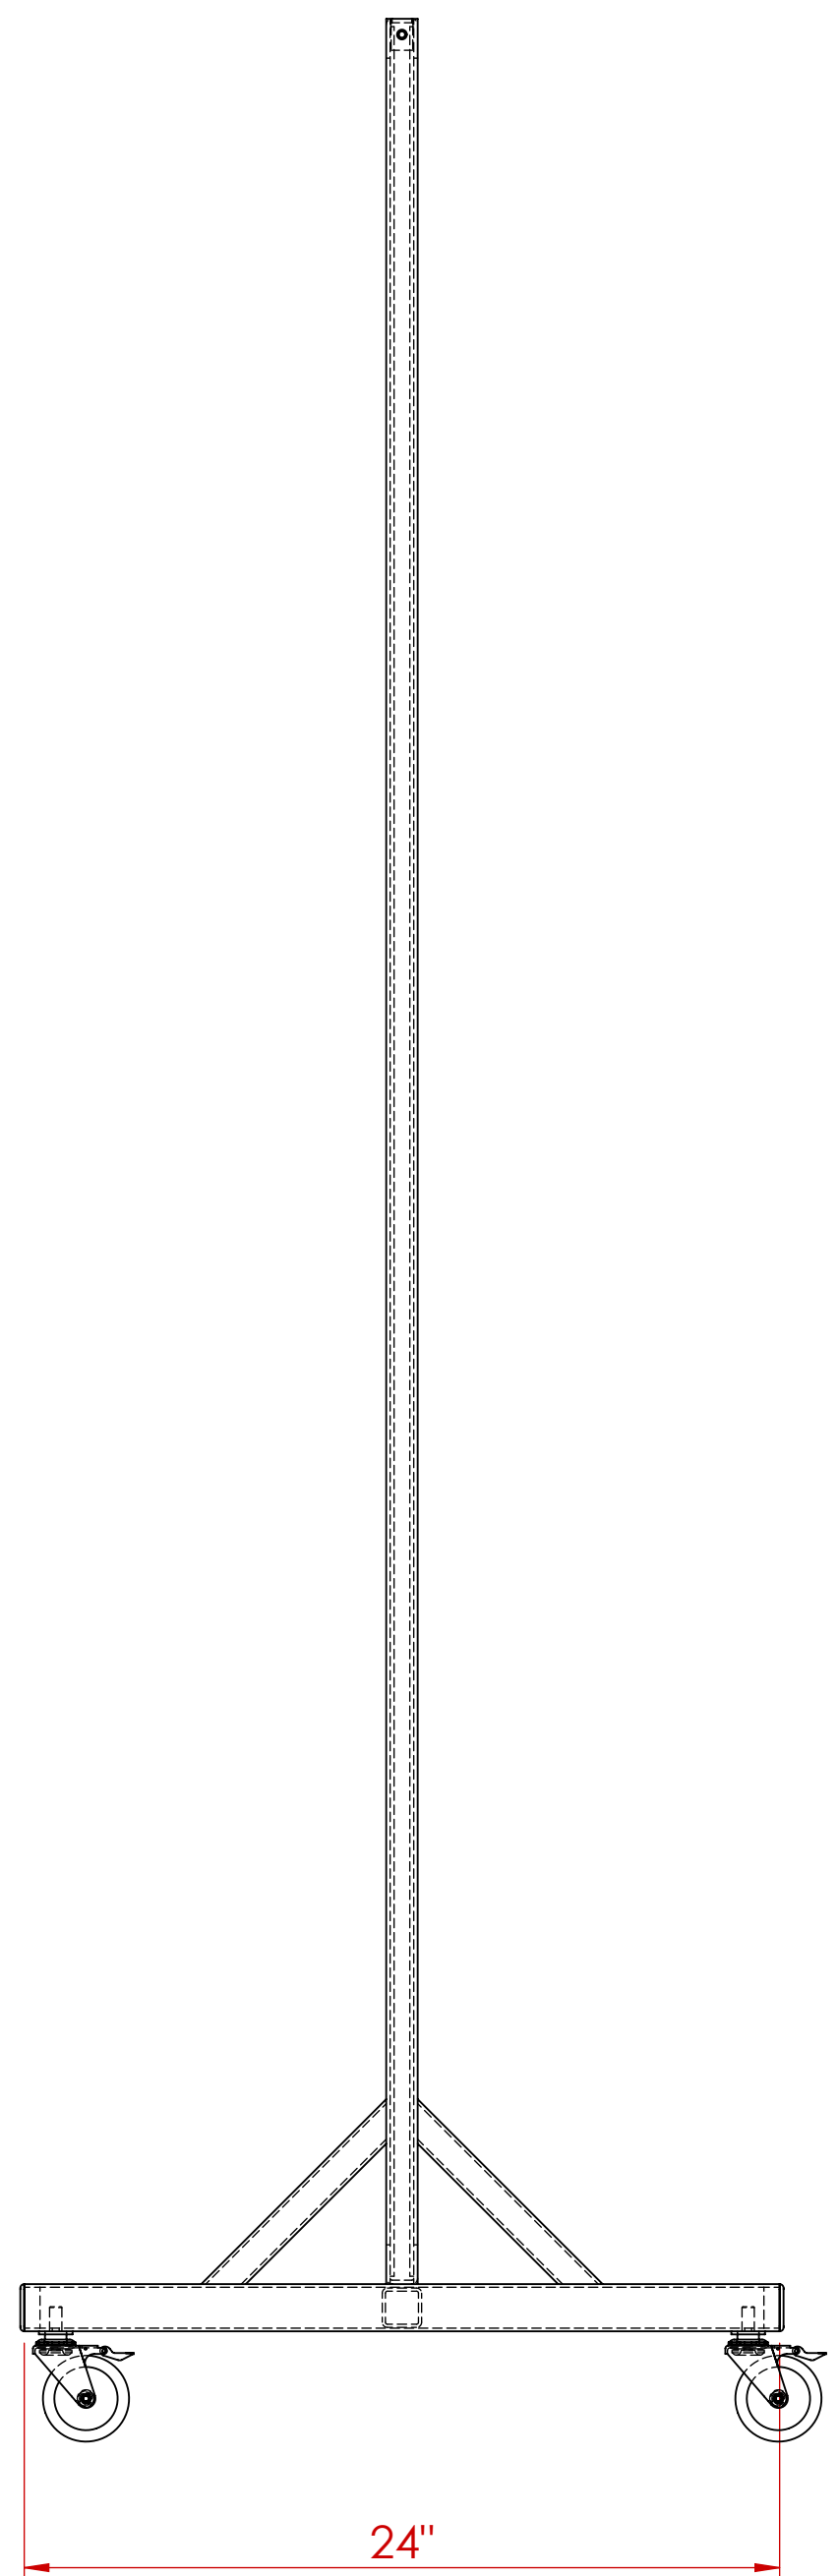

24"

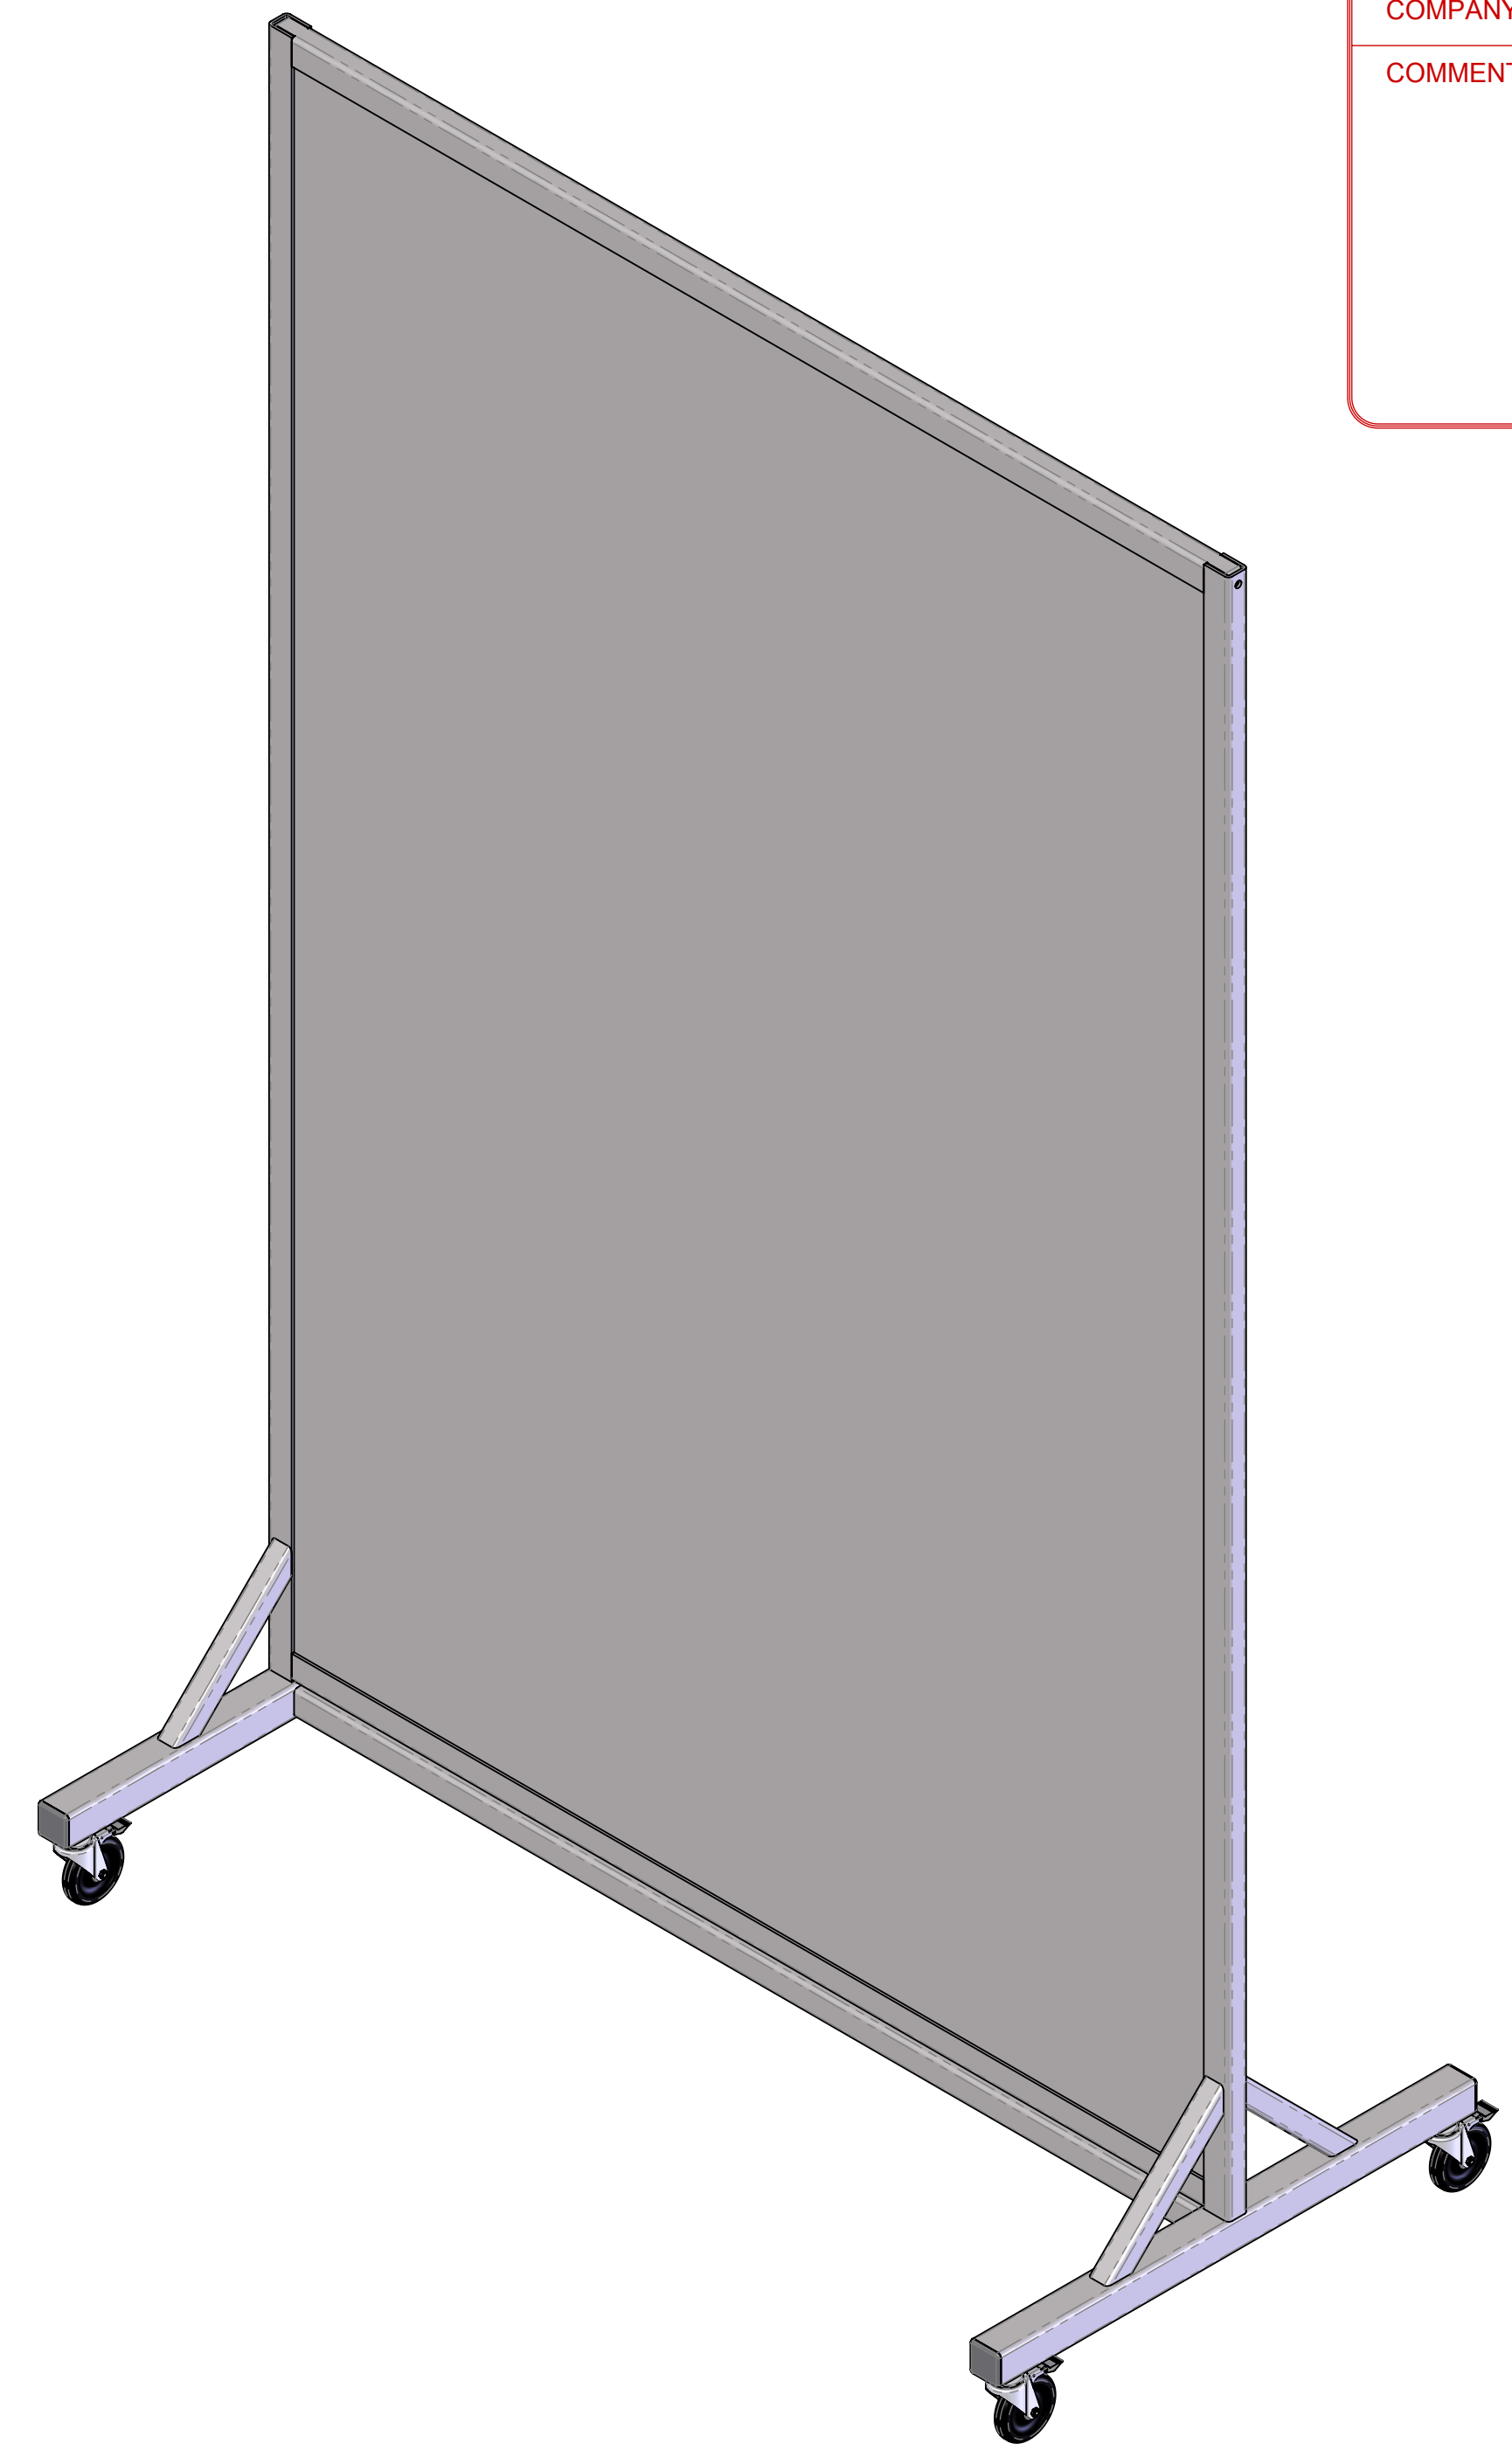

CUSTOMER APPROVAL ENDORSEMENT

APPROVED AS SHOWN

APPROVED WITH CHANGES SHOWN

BY: _____ DATE: _____

TITLE: _____

COMPANY: _____

COMMENTS: _____

NOTES:

1. ALL UNITS ARE INCHES (mm) UNLESS OTHERWISE SPECIFIED
2. DIMENSIONAL TOLERANCES: +/- 1/4"

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING DIMENSIONS SHOWN IN PARENTHESES ARE FOR REFERENCE ONLY (XXX) DIMENSIONS ARE IN INCHES (mm) TOLERANCES APPLY AS SHOWN BELOW X = ± 0.005 XX = ± 0.010 XXX = ± 0.020 REVISIONS 0.1/4" ANGLES ± 0.50°	ALL MACHINED SURFACES TO BE \sqrt{R} ALL WELD SPECIFICATIONS PER WELD SHOP	SolidWorks MAINTAINED DATA CHANGES SHALL BE INCORPORATED ELECTRONICALLY BY THE DESIGN ACTIVITY MODEL NUMBER:		Custom Radiation Protection, Shielding and Storage
		DRAWN BY: M.S.D. DATE: 6/18/2018 CHECKED BY: _____ DATE: _____ APPROVED BY: _____ DATE: _____	TITLE: ROLLING BARRIER ASSEMBLY CUSTOMER/DEALER:	D MSRB 480072-0.8 Rev.4-19