

48 ⁵/₈"


SAF-T-LITE
SAFETY LEAD GLASS
1/16" (1.6 mm) LEAD EQUIVALENT
48" WIDE X 36" HIGH

36 ¹/₂"


SOLID PANEL
1/16" (1.6 mm) LEAD LINED
LEADED PLYWOOD
ENCAPSULATED BETWEEN
ABS PLASTIC PANELS BOTH SIDES

35 ¹/₂"

77" OVERALL HEIGHT (INCLUDING WHEELS)

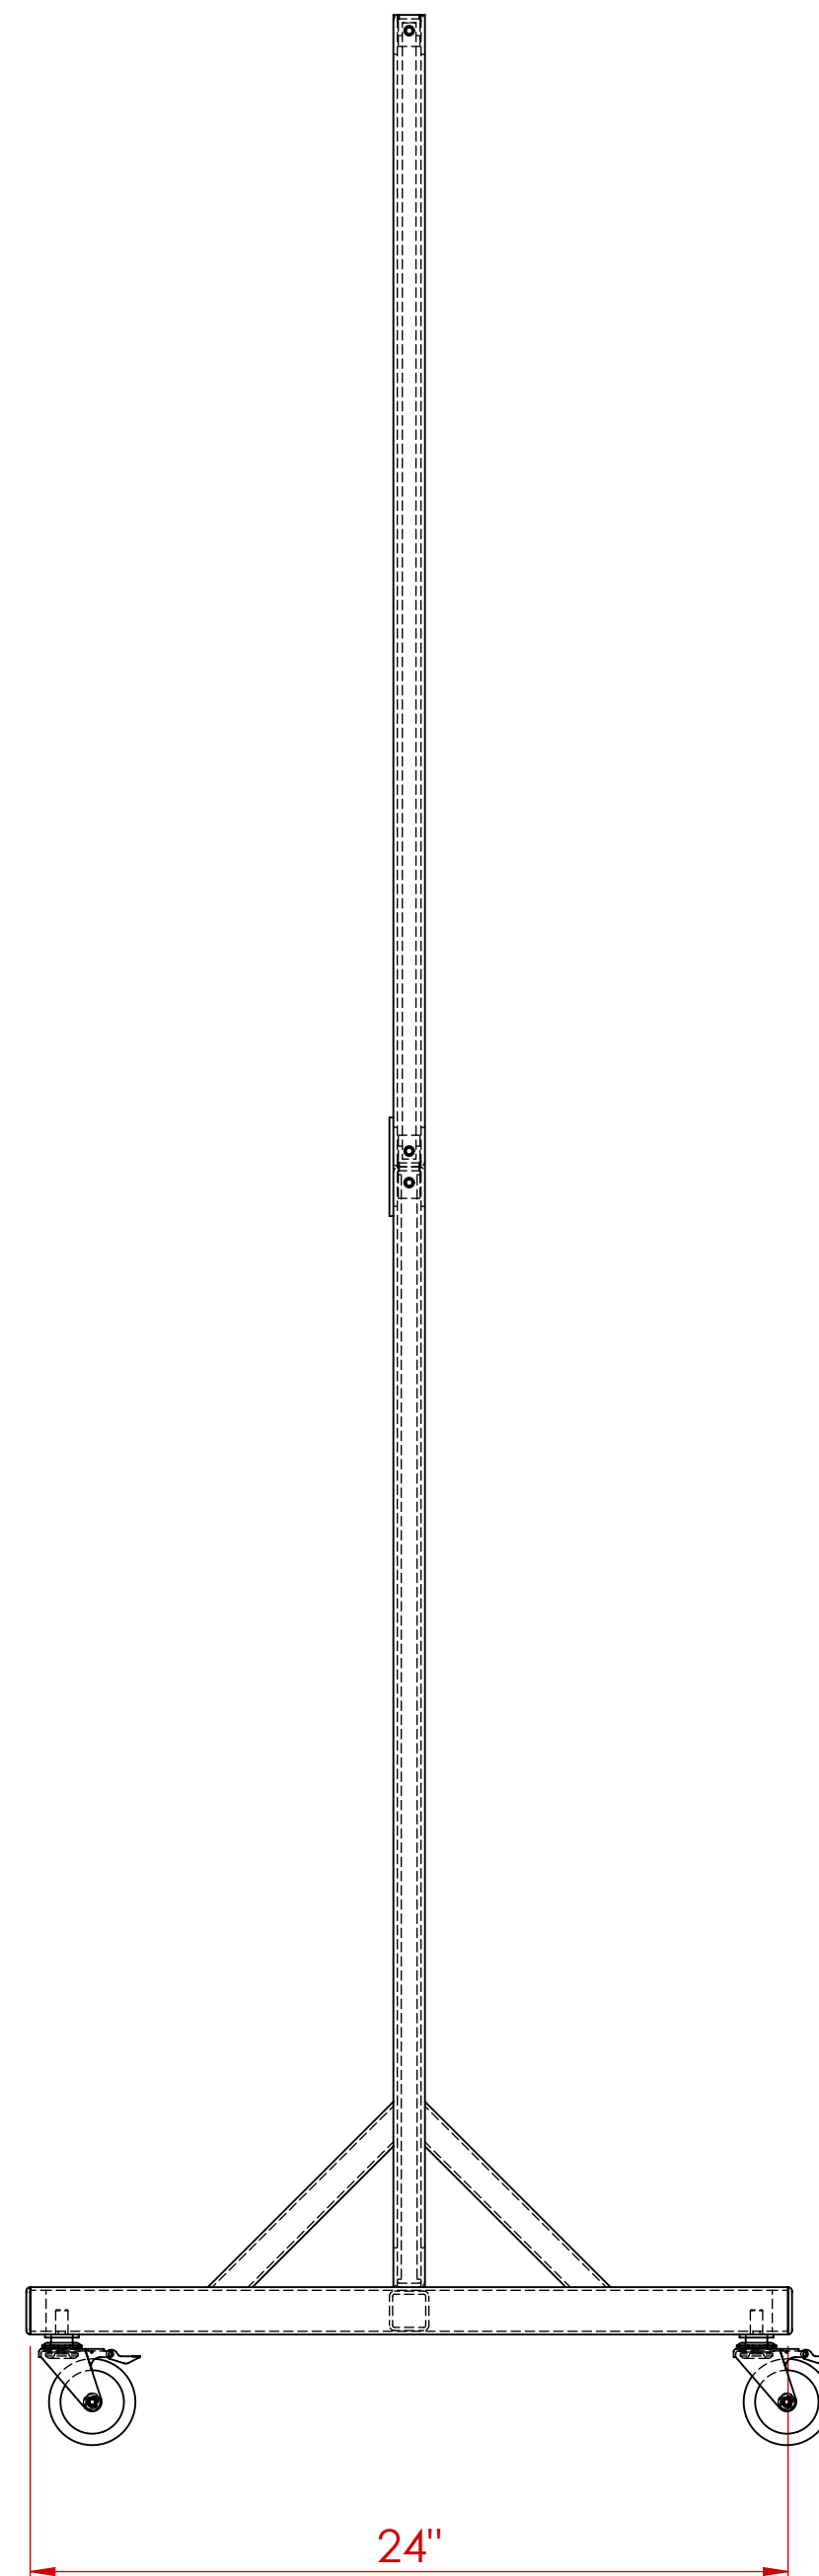

24"

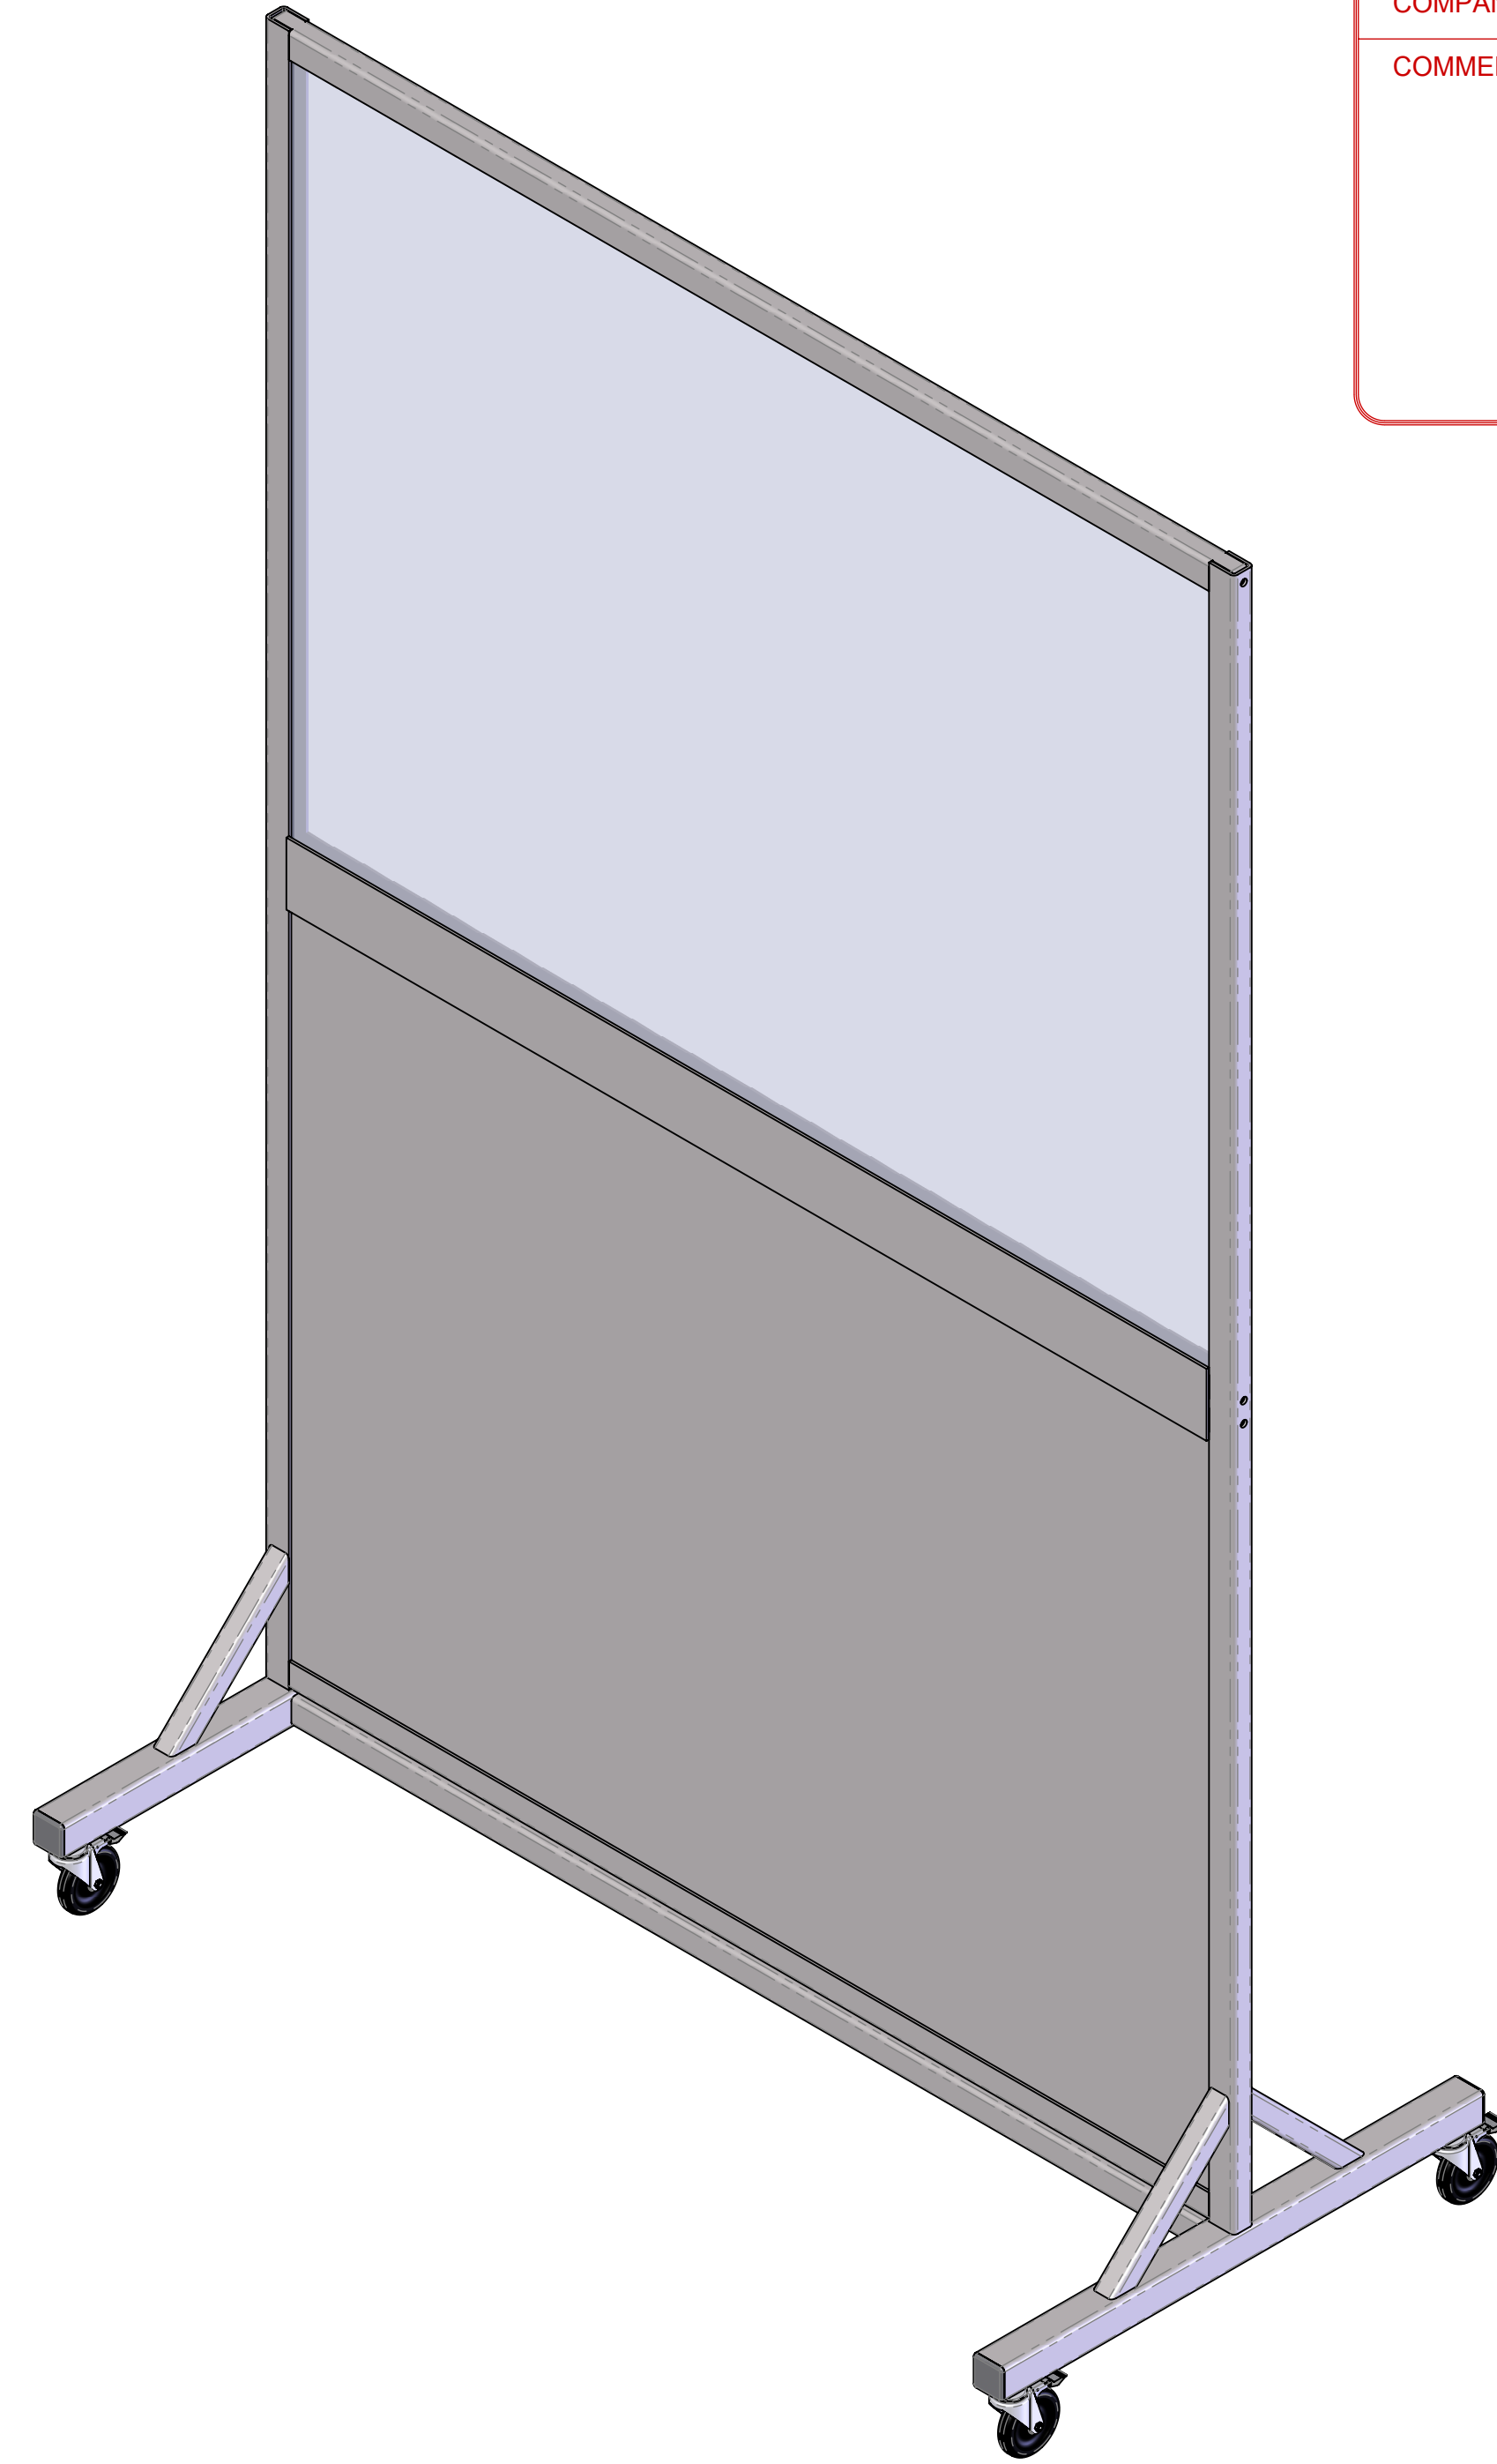

CUSTOMER APPROVAL
ENDORSEMENT

- APPROVED AS SHOWN
- APPROVED WITH CHANGES SHOWN

BY: _____ DATE: _____

TITLE: _____

COMPANY: _____

COMMENTS: _____

NOTES:

1. ALL UNITS ARE INCHES (mm) UNLESS OTHERWISE SPECIFIED
2. DIMENSIONAL TOLERANCES: +/- 1/4"
3. GLASS INSTALLED ON SITE BY END USER - GLASS SHIPPED SEPARATELY

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING DIMENSIONS SHOWN IN PARENTESIS ARE FOR REFERENCE ONLY (XX) DIMENSIONS ARE IN INCHES (mm) TOLERANCES APPLY AS SHOWN BELOW X = ± 0.001 XX = ± 0.002 XXX = ± 0.005 REVISIONS 0.1/4" ANGLE ± 0.001"	ALL MACHINED SURFACES TO BE \sqrt{R} ALL WELD SPECIFICATIONS PER WELD SHOP	SolidWorks MAINTAINED DATA CHANGES SHALL BE INCORPORATED ELECTRONICALLY BY THE DESIGN ACTIVITY MODEL NUMBER:		Custom Radiation Protection, Shielding and Storage
		DRAWN BY: M.S.D. DATE: 6/18/2018 CHECKED BY: _____ DATE: _____ APPROVED: _____ DATE: _____	TITLE: ROLLING BARRIER ASSEMBLY CUSTOMER/DEALER: _____ MODEL NUMBER: MSRB 483636-1.6 Rev.4-19	SCALE: 1:6 SHEET 1 OF 1